




# SKIOLD DISC MILL SK10T

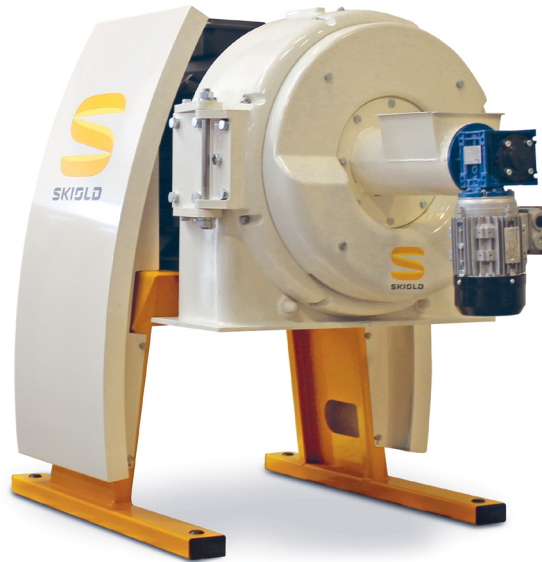

SKIOLD MAKES THE DIFFERENCE!

## SKIOLD DISC MILL SK10T

Optimal feed structure for all animal groups

Exceptional durability on wearing parts


Low power consumption

Capacity up to 12 t/h

Quiet running



# SKIOLD DISC MILL SK10T

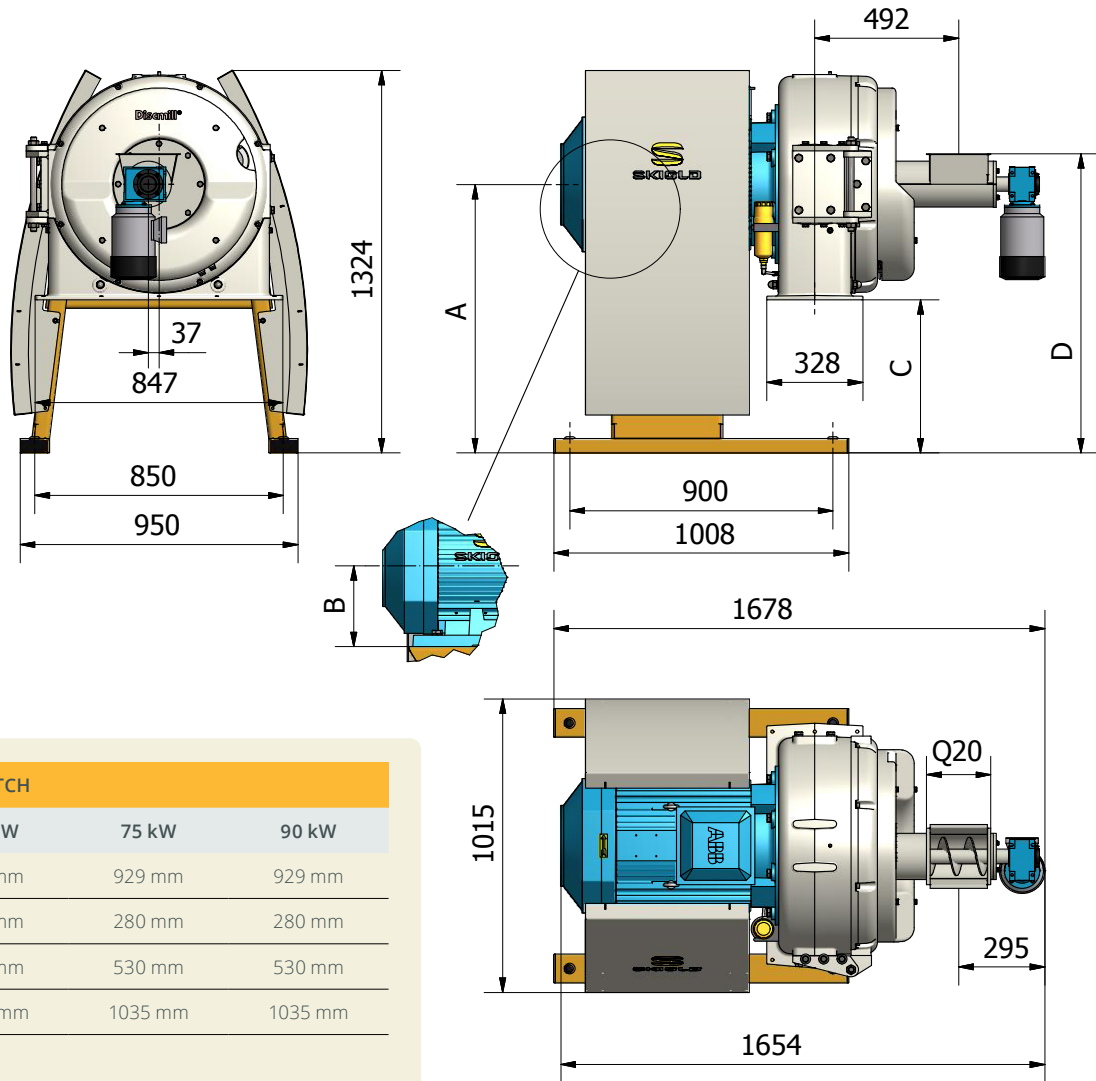

## MEASURE SKETCH

	55 kW	75 kW	90 kW
A	899 mm	929 mm	929 mm
B	250 mm	280 mm	280 mm
C	500 mm	530 mm	530 mm
D	1005 mm	1035 mm	1035 mm

## TECHNICAL SPECIFICATIONS

Main motor (kW):	55 / 75 / 90
Motor rotation speed (rpm):	3000
Disc diameter, external (mm):	550
Distance regulation:	Automatic
Approx. noise level (dB):	80
Weight (kg):	1100-1400
Feeding auger:	0,75
Auger rotation speed (rpm):	2800

## CAPACITY

Cereal	55 kW	75 kW	90 kW
Barley	3000-10000	4000-13000	7000-16000
Wheat	3000-12000	4000-15000	7000-18000
Maize	3000-12000	4000-15000	7000-18000
Oats	2500-9000	3000-12000	6000-14000
Peas	2500-9000	3000-12000	6000-14000

In storage dry and well cleaned crops, max. kg/h.  
The capacity depends on the grinding fineness

SKIOLD SK10T DISC MILLS may be used for grinding of ordinary cleaned small-grained seed crops in storage dry condition and with a maximum diameter of 10 mm. Wheat, barley etc. can furthermore be ground from air tight silo with up to 25 % moisture content. However, please note that the capacity is reduced by approx. 5 % for each percentage of moisture content higher than 15 % - for example 18 % moisture content reduces the capacity by  $(18-15) \times 5 = 15 \%$ .

The disc mill is also suitable for granulation of clean pelleted feed products, and wood pellets, with a pellet diameter of up to  $\varnothing 16$  mm.